

Micro-Miniature Slide Type

Application

- ✓ Audio, Home appliance, Lighting control, etc.

Feature

- ✓ Smooth sliding feeling



■Specification

Travel Distance	15 mm
Insulation Resistance	50 MΩ Min. at 100V DC
Dielectric Strength	100V AC , 1 minute
Operating Temperature Range	-10 °C~70°C
Operating Force	20~200 gf.cm
Sliding Life	5,000 cycles

■How to order

RA1503F-A02 – 033GF - B10K

Model

Lever Type

Taper and Resistance Value

Ex:

Order Code	Taper	Resistance Value
A100K	Audio/Log/A	100KΩ
B1M	Linear/B	1MΩ

Taper: A and B


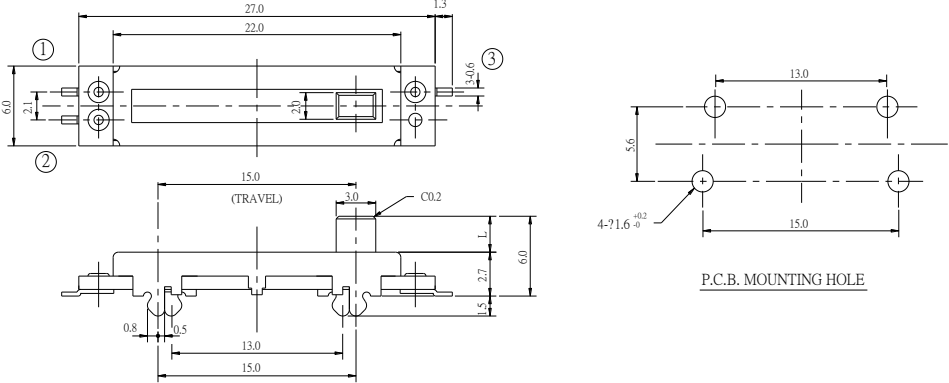
Resistance Value: 1KΩ to 500KΩ and 1MΩ

*Contact us for other requirements.

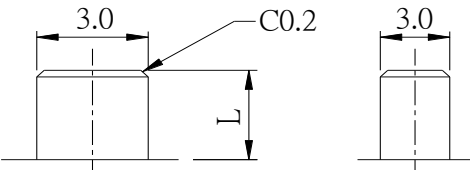
Micro-Miniature Slide Type

Model Description

Model	Number of Unit	Travel Distance	Type of Terminal	Mounting Height
RA1503F-A02	Single Unit	15mm	PC board (vertical)	2.7mm

Order Code	Outline Drawing
RA1503F-A02	  <p>The drawing includes the following dimensions: Top view shows a total length of 27.0mm and a terminal spacing of 22.0mm. Side view shows a height of 6.0mm and a travel distance of 15.0mm. P.C.B. mounting hole view shows a hole diameter of 4-ϕ1.6$^{+0.02}_{-0}$ and a hole-to-hole distance of 15.0mm. Other dimensions include 1.3mm, 3.0mm, 1.5mm, 2.7mm, 0.8mm, 0.5mm, 13.0mm, 15.0mm, 2.1mm, 3.0mm, and 3.0mm.</p>

Lever Type

Model	RA1503F series
Lever Type	GF
Dimensions	
Length(L)	3.3

Design and specifications presented here are for the standard parts only. Please kindly contact us for your special requests and ask for the current technical specifications before purchase and/or use

[Back to top](#)