

Micro-Miniature Slide Type

Application

- ✓ Audio, Home appliance, Lighting control

Feature

- ✓ Smooth sliding feeling



■Specification

Travel Distance	10mm
Insulation Resistance	50 MΩ Min. at 100V DC
Dielectric Strength	100V AC , 1 minute
Operating Temperature Range	-10 °C~70°C
Operating Force	20~200 gf.cm
Sliding Life	5,000 cycles

■How to order

RA1010F-20 – 05BB - B10K

Model

Lever Type

Taper and Resistance Value

Ex:

Order Code	Taper	Resistance Value
A100K	Audio/Log/A	100KΩ
B1M	Linear/B	1MΩ

Taper: A and B

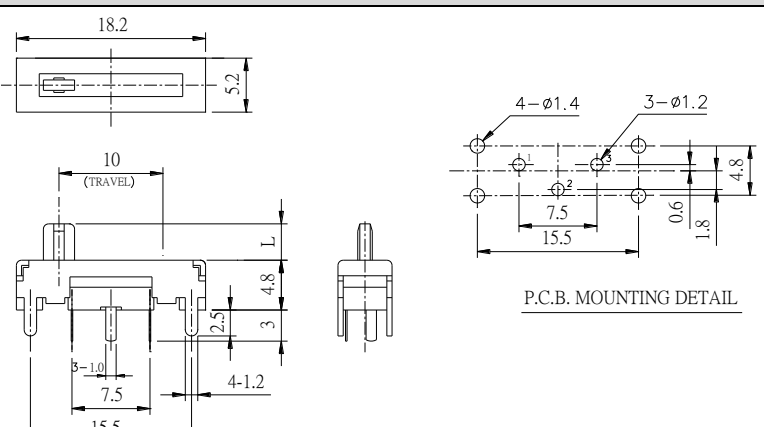
Resistance Value: 1KΩ to 500KΩ and 1MΩ

*Contact us for the other requirements.

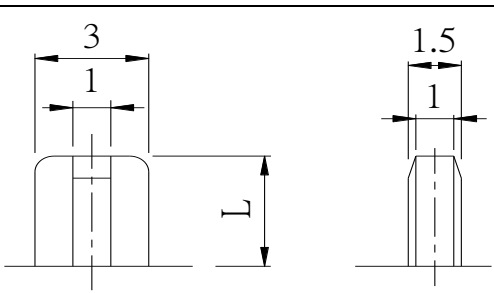
Micro-Miniature Slide Type

Model Description

Model	Number of Unit	Travel Distance	Type of Terminal	Mounting Height
RA1010F-20	Single Unit	10mm	PC board (vertical)	4.8mm

Order Code	Outline Drawing
RA1010F-20	

Lever Type

Model	RA1010F series
Lever Type	BB
Dimension	
Length (L)	5

Design and specifications presented here are for the standard parts only. Please kindly contact us for your special requests and ask for the current technical specifications before purchase and/or use.

[Back to top](#)