

Membrane Force Sensor




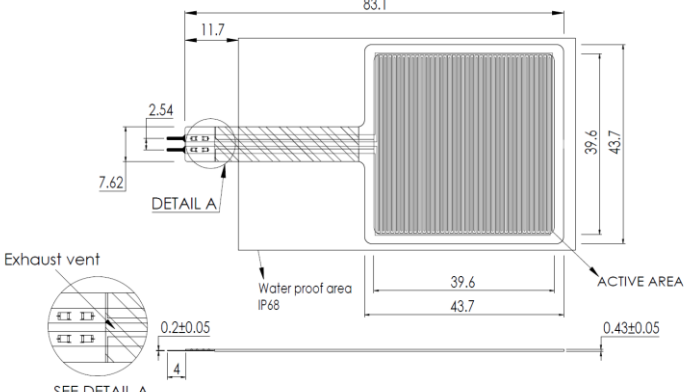
39.6mm Square Active Area

Application

- ✓ Fitness, Medical, Industrial and many others





Feature

- ✓ Waterproof Design, Ultra-thin profile, High Temperature & Humidity Performance, Excellent Repeatability

Order Code	Outline Drawing
<p>MF02A-N-221-A02</p> 	

INSPECTION ITEM	SPECIFICATION
FORCE SENSITIVITY RANGE	30g ~ 1000g (0.3N ~ 9.8N)
FORCE RESOLUTION	Continuous(Analog)
STAND-OFF RESISTANCE (UNLOADED)	>20MΩ
FORCE REPEATABILITY (SINGLE PART)	2%
FORCE REPEATABILITY (PART TO PART)	5% (Single batch)
RESPONSE TIME	<1ms
LONG TERM DRIFT	<10% log10(time)
HYSTERESIS	10%
LIFE CYCLE (WITHOUT FAILURE)	>10 Million
OPERATING TEMPERATURE	-30°C to +85°C
HIGH HUMIDITY STORAGE	+70°C, 85%RH x 96hrs
HIGH TEMPERATURE STORAGE	+85°C x 120hrs
LOW TEMPERATURE STORAGE	-30°C x 120hrs
IP RATING FOR WATER PROOF AREA	IP68

CONNECTOR OPTIONS

Bare Tail	Female Contacts	Solder Tabs (pin)	Female Contact with Housing
			

Design and specifications presented here are for the standard parts only. Please kindly contact us for your special requests and ask for the current technical specifications before purchase and/or use.